


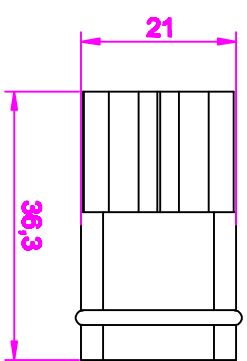


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED



技术参数:

插芯:
 插针数: 3+PE
 额定电流: 40A
 工作电压: 400V
 额定耐受脉冲电压: 6KV
 污染等级: 3
 材料: Polycarbonate

Specifications:

Inserts:
 Number of contacts: 3+PE
 Rated current: 40A
 Rated voltage: 400V
 Rated impulse voltage: 6KV
 Pollution degree: 3
 Material: Polycarbonate

Contacts:

插针:
 接线方式: 冷压连接
 材料: 铜合金
 表面处理: 镀银/镀金
 接触电阻: $\leq 1m\Omega$
 线径范围: 1.5~10.0mm² (AWG16-8)

Terminal: Crimp terminal
 Material: Brass
 Surface: hard-silver plated/Glod plated
 Contact resistance: $\leq 1m\Omega$
 Crimp terminal
 Wire gauge--mm²: 1.5~10.0mm²
 Wire gauge--AWG: 16-8

Tolerance	SIGNATURE	DATE	Units	mm	PART NAME: HZW-HQ3-003-MC	Drawing NO.	REV
0~≤20 ±0.15			Size	A4	宁波欧科瑞连接器有限公司 NINGBO OUKERUI CONNECTOR CO., LTD.		
20~≤50 ±0.25			Scale				
50~≤80 ±0.35	CHECK		Sheet				
80~≤120 ±0.50 APPROVE			Proj.				A