




表面镀层	表面镀金	Wire gauge	φ	D
CCSF-1.5	CCGF-1.5	1.5 mm ² AWG 16	1.75	3.0
CCSF-2.5	CCGF-2.5	2.5 mm ² AWG 14	2.25	3.5
CCSF-4.0	CCGF-4.0	4.0 mm ² AWG 12	2.85	3.9
CCSF-6.0	CCGF-6.0	6.0 mm ² AWG 10	3.5	5
CCSF-10.0	CCGF-10.0	10.0 mm ² AWG 8	4.3	5.6

REVISION DATA		
SYM	DESCRIPTION	DATE

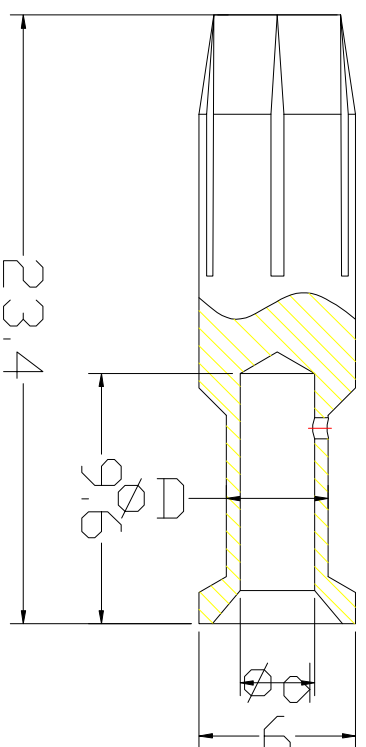

技术参数：
01、材料：铜合金
02、表面处理：镀银/镀金
03、额定电流：40A
04、接触电阻： $\leq 3m\Omega$
05、线径范围：1.5-2.5mm² (16-8 AWG)
06、可插拔次数： ≥ 500

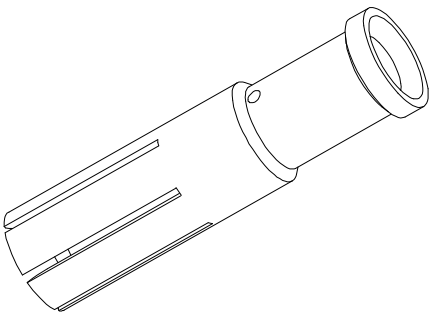

Tolerance	SIGNATURE	DATE	Units	mm	PART NAME: HZW-40A-FC(冷压公插针)
0~≤6 ±0.03	DRAW		Size	A4	 宁波欧科瑞连接器有限公司 NINGBO OKERUI CONNECTOR CO., LTD.
6~≤20 ±0.06	DESIGN		Scale	1.5:1	
20~≤50 ±0.10	CHECK		Sheet	1/1	
50~≤80 ±0.20	APPROVE		Proj.		Drawing NO.
					Material
					REV
					A