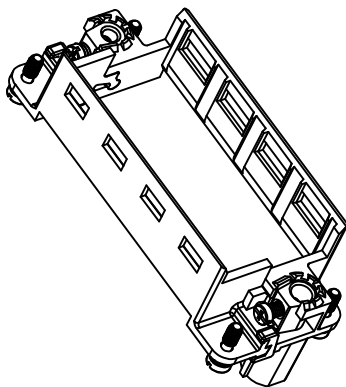
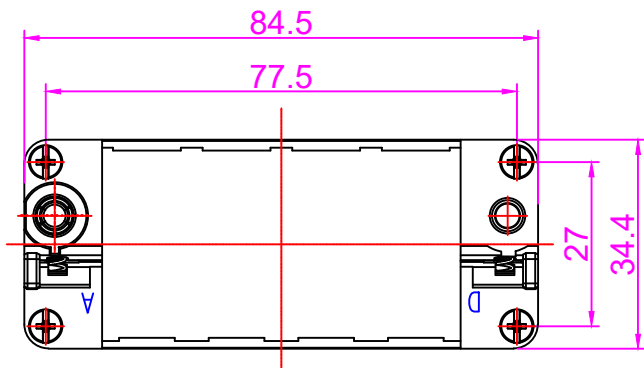
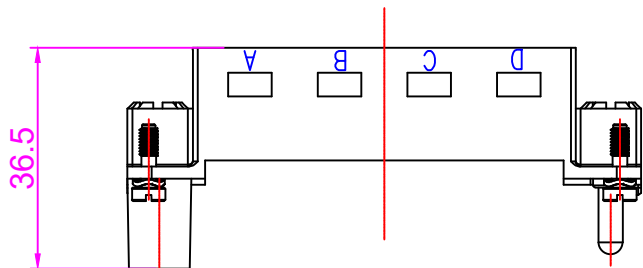




| REVISION DATA | | | | |
|---------------|-----|-------------|------|----------|
| SYM | ECN | DESCRIPTION | DATE | APPROVED |
| | | | | |
| | | | | |



技术参数:
 材料: 锌合金
 表面处理: 镀锌
 温度范围: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
 模块数量: 4
 接地线、
 功率线: $4 \sim 10\text{mm}^2$ (AWG12-8)
 信号线: $1 \sim 2.5\text{mm}^2$ (AWG18-14)
 插拔次数: ≥ 500

Specifications:
 Material: zinc alloy
 Surface: Galvanization
 Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
 Number of modules: 4
 PE contact,
 Power side:
 Wire gauge-- mm^2 : $4.0 \sim 10\text{mm}^2$
 Wire gauge--AWG: 12-8
 Signal side:
 Wire gauge-- mm^2 : $1.0 \sim 2.5\text{mm}^2$
 Wire gauge--AWG: 18-14
 Mechancial working life (Mating cycles): ≥ 500

| Tolerance | | SIGNATURE | DATE | Units | mm |  宁波欧科瑞连接器有限公司 NINGBO OUKERUI CONNECTOR CO., LTD. | |
|-----------------------------|---------|-----------|------|-------|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|-----|
| $0 \sim \leq 20 \pm 0.15$ | DRAW | | | Size | A4 | | |
| $20 \sim \leq 50 \pm 0.25$ | DESIGN | | | Scale | | PART NAME: HZW-HF16B-UA | |
| $50 \sim \leq 80 \pm 0.35$ | CHECK | | | Sheet | | Drawing NO. | REV |
| $80 \sim \leq 120 \pm 0.50$ | APPROVE | | | Proj. |  | Material | A |