

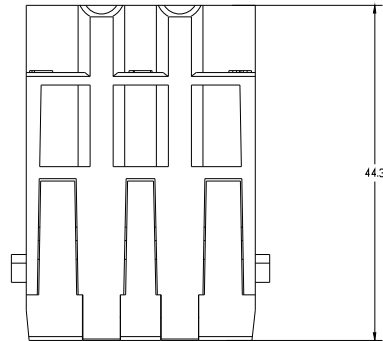


6		7		8	
SYM		ECN		REVISION DATA	
				DESCRIPTION	
				DATE	
				APPROVED	



技术参数:

插芯:  
 插针数: 7  
 额定电流: 40A  
 工作电压: 830V  
 额定脉冲电压: 8KV  
 污染等级: 3  
 材料: Polycarbonate

插针:


接线方式: 冷压连接  
 材料: 铜合金  
 表面处理: 镀银/镀金  
 接触电阻:  $\leq 1m\Omega$   
 线径范围: 1.5~10mm<sup>2</sup> (AWG16-8)



Specifications:

Inserts:  
 Number of contacts: 7  
 Rated current: 40A  
 Rated voltage: 830V  
 Rated impulse voltage: 8KV  
 Pollution degree: 3  
 Material: Polycarbonate

Contacts:

Terminal: Crimp terminal  
 Material: Brass  
 Surface: hard-silver plated/Gold plated  
 Contact resistance:  $\leq 1m\Omega$   
 Crimp terminal  
 Wire gauge--mm<sup>2</sup>: 1.5~10mm<sup>2</sup>  
 Wire gauge--AWG: 16-8

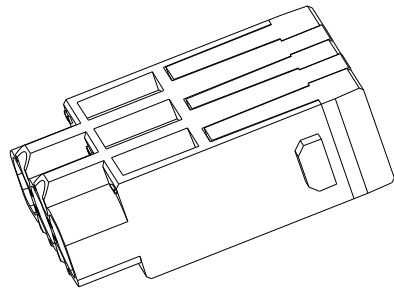

Tolerance		SIGNATURE	DATE	Units	mm	 宁波欧科瑞连接器有限公司 NINGBO OUKERUI CONNECTOR CO.,LTD.	
0~ $\leq 20$ $\pm 0.15$	DRAW			Size	A4	PART NAME: HZW-HMKX-003/4-MC	
20~ $\leq 50$ $\pm 0.25$	DESIGN			Scale		Drawing NO.	REV
50~ $\leq 80$ $\pm 0.35$	CHECK			Sheet			
80~ $\leq 120$ $\pm 0.50$	APPROVE			Proj.		Material	A