
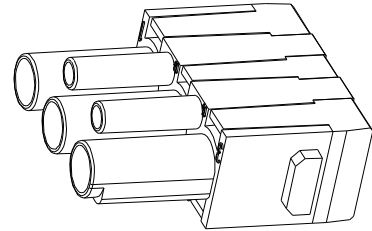




6		7		8	
REVISION DATA					
SYM	ECN	DESCRIPTION	DATE	APPROVED	





技术参数:
 插芯:
 插针数: 4/3
 额定电流: 40A/10
 工作电压: 830V
 额定脉冲电压: 8KV
 污染等级: 3
 依据UL的额定电压: 600V
 材料: Polycarbonate

插针:
 接线方式: 冷压连接
 材料: 铜合金
 表面处理: 镀银/镀金
 接触电阻: $\leq 1m\Omega / \leq 3m\Omega$
 线径范围: 1.5~10mm² (AWG16-10)
 0.14~2.5mm² (AWG26-14)

Specifications:
 Inserts:
 Number of contacts: 4/3
 Rated current: 40A/10
 Rated voltage: 830V
 Rated impulse voltage: 8KV
 Pollution degree: 3
 Rated voltage acc.toUL:600V
 Material:Polycarbonate

Contacts:
 Terminal: Crimp terminal
 Material: Brass
 Surfac: hard-silver plated/Glod plated
 Contact resistance: $\leq 1m\Omega / \leq 3m\Omega$

Crimp terminal
 Wire gauge--mm²: 1.5~10mm² 0.14~2.5mm²
 Wire gauge--AWG: 16-10/26-14

Tolerance		SIGNATURE	DATE	Units	mm	 宁波欧科瑞连接器有限公司 NINGBO OUKERUI CONNECTOR CO.,LTD.	
0~≤20 ±0.15	DRAW			Size	A4		
20~≤50 ±0.25	DESIGN			Scale		PART NAME: HZW-HMKX-003/4-FC	
50~≤80 ±0.35	CHECK			Sheet		Drawing NO.	REV
80~≤120 ±0.50	APPROVE			Proj.		Material	A